



Specifications

SMART Board 2075 display

Model SBD-2075


Overview

The SMART Board 2075 display is a 75" non-touch LED display with built-in screen sharing that supports iOS, Android and Microsoft platforms.

The 4K ultra-high-definition display serves as an active collaboration hub between student and teacher devices to allow for greater levels of student engagement. The SMART Board 2075 display is a cost-effective solution that offers educators flexibility in their implementation of technology in classrooms for whole class and small group collaboration.

Dimensions and weights*

Dimensions

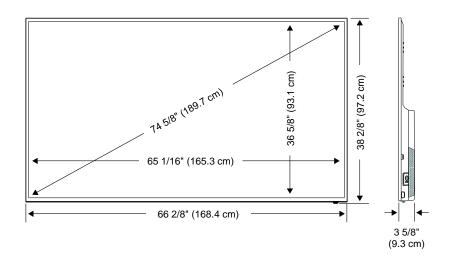

Weight

69 lb 11 oz (31.6 kg)

Shipping weight (including pallet)

109 lb. 9 oz. (49.7 kg)

Shipping dimensions (including pallet)

73 3/8" W × 49 1/4" H × 11 1/2" D (186.4 cm × 125.1 cm × 29.3 cm)

^{*}All dimensions \pm 1/8" (0.3 cm). All weights \pm 2 lb. (0.9 kg).

Hardware

Screen sharing

Ethernet 10/100 Mbps LAN

Wireless 802.11 a/b/g/n

Dual-band 2.4/5 Ghz

Bluetooth® Version 4.0

Display

Aspect ratio 16:9

Optimal resolution 3840 × 2160 at 60 Hz

Contrast ratio (typical) 5000:1

Brightness (typical) 450 cd/m^2

Refresh rate 60 Hz

Display type Full array LED

Response time 6.5 ms

Viewing angle 178°

UHD upscaling Yes

Supported video codecs H.264, H.265, VP8, VP9

Audio

Speakers 10 W integrated speakers (×2)

Noise level <30 dBA

Included cables and

accessories Remote control

Mounting holes For a standard VESA 600 mm × 400 mm mounting plate

Country-specific power cable

Connectors

Back HDMI in (×2)

VGA in

Component in

DisplayPort in

RCA audio in

RCA audio out

Stereo 3.5 mm audio line in

Room control RS-232 in

USB 2.0 type-A service port

Ethernet RJ45

Installation requirements

Display See the SMART Board 2000 series display user's guide

Room computer and guest laptops

General requirements See smarttech.com/SMARTNotebookReleaseNotes

4K UHD Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5

memory. See kb.smarttech.com/?q=15546

Mini-computers

General requirements See smarttech.com/SMARTNotebookReleaseNotes

Dimensions Smaller than 10" \times 10" \times 2" (25.4 cm \times 25.4 cm \times 5.1 cm)

Weight Less than 10 lb. (4.5 kg)

Mounting VESA 75 mm \times 75 mm or 100 mm \times 100 mm mounting pattern

Cable requirements

HDMI HDMI 1.4 compliant or better

Maximum length: 23' (7 m)

DisplayPort DisplayPort 1.2 compliant or better

Maximum length: 23' (7 m)

Important Using cables that exceed these maximum lengths may produce unexpected results and

degraded picture quality. Refer to the SMART installation standards (smarttech.com/kb/171035)

for a comprehensive guide on cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Power consumption

Standby mode <0.3 W max

Normal operating 205 W

Operating temperature 41-95°F (5-35°C)

Storage temperature -4-140°F (-20-60°C)

Humidity 10-80% relative humidity, non-condensing

Purchasing information

Order number

SBD-2075 SMART Board 2075 interactive display with SMART Learning Suite

Optional accessories

WM- SBID- 501 Fixed wall mount for SMART interactive flat panels

Other See smarttech.com/accessories

Warranty Three-year limited equipment warranty

EWY1-SBD-2075 One-year warranty extension

EWY2-SBD-2075 Two-year warranty extension